

The Best Choice for Protective Paper Packaging



PackTiger® Paper Cushioning System

Fast, Easy and Reliable Paper System

Create Paper Packaging at Unmatched Speeds

The PackTiger® paper packaging system from Sealed Air, the fastest paper packaging system in the industry, creates custom-length paper pads, up to 150 per minute, which can be used in a variety of packaging techniques, including cushioning and blocking and bracing.



Push-Button Operation and Easy Loading




The PackTiger® system features an easy-to-use control panel that stores up to 24 custom pad configurations. In manual mode, creating pads is as simple as pushing a button or foot pedal. The PackTiger® system can also

be run in automatic mode, using easy, one-touch access buttons for frequently-used pad configurations. The bottom-loading design creates fast material changeovers, getting you up and running in no time.

Environment...Energy...Economy...

The PackTiger* paper cushioning system provides environmental stewardship at every stage of the production process. It starts with TigerPad* material, which contains 85% Post Industrial and 15% Post Consumer

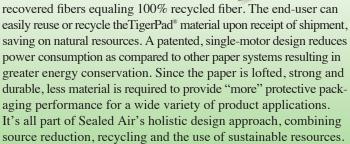

* Can be recycled with mixed paper. **Supplied in North America.

Effortlessly Integrates Into Your Current Operation

The elegant design of the PackTiger® system allows you to seamlessly integrate it into your current packaging operation

with ease. The system is ideal for workstations, as TigerPad® material can be used straight from the system or batched into bins. Options such as a foot pedal and remote keypad make the PackTiger® system suitable for online operation as well. At half the weight and footprint of traditional paper packaging systems, the portable PackTiger® system is easy to position anywhere.



The Sealed Air Advantage

The PackTiger® system provides something no other paper system can match: the peace of mind that comes with selecting a rugged and dependable Sealed Air packaging system. The PackTiger® system is supported by 50 years of Sealed Air packaging expertise, and is built to last, delivering greater uptime and a more profitable packaging operation.

Specifications

Electrical:

110-120 V ~ Single Phase 9.1 A 50/60 Hz 220-240 V ~ Single Phase 7 A 50 Hz

Weight (without roll): 309 lbs. 140 kg.

Overall Size (L x W x H): 34" x 27" x 59"

.87m x .69m x 1.5m

4'-11" (1.5m) 2'-10" (.69m)

Distributed By:

Sealed Air

Protective Packaging 301 Mayhill Street Saddle Brook, NJ 07663-5303 800-648-9093 Fax: 201-712-7070 www.packtiger.com